


# PYLE®

[WWW.PYLEAUDIO.COM](http://WWW.PYLEAUDIO.COM)

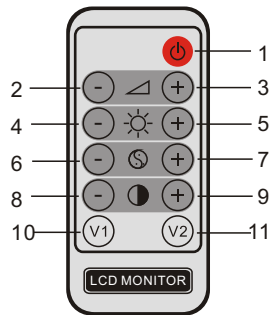


- 1. Power on/off
- 2. Volume-
- 3. Volume+
- 4. Brightness-
- 5. Brightness+
- 6. Color-
- 7. Color+
- 8. Contrast-
- 9. Contrast+
- 10. Video Input 1
- 11. Video Input 2

## Accessories

- (1) Connecting Cable x1
- (2) Headrest Shroud x1
- (3) Release Key x1
- (4) Operation Manual x1
- (5) Stand Bracket x1
- (6) Remote Control x1
- (7) Front AV Cable x1

PLH9SP

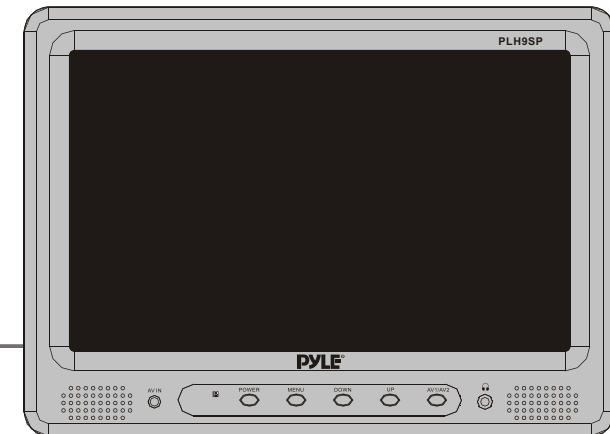

Color TFT LCD 9.2" Monitor

## Warning


### CAUTION

1. The driver must not be able to view operational monitor while driving the vehicle . This is illegal in most states. CHECK with your local law enforcement officials for details .
2. Always check polarity when connecting wire to avoid damage to the unit and /or vehicle.
3. Do not open the housing of the monitor ,Servicing must be done at our factory by authorized technicians to maintain the warranty.


## Specifications

System	NTSC/PAL Auto Switch
Power Input/Consumption	DC(10.5~15V)±10% ,<700mA
Video Input	Composite Video Signal 1Vp-p 75Ohm
Audio Input	0.5W 8 Ohm at 300mv input
Operating Temperature	-5°C~+50°C
Storage Temperature	-20°C~+60°C
Screen Size(Diagonal)	9.2”
Display Method	TFT Active Matrix System
Resolution(Dot)	800(H)xRGBx480(V)
Back Light	Cold Cathode Filament Tube
Viewing Area	203(W)x122(H)mm
Viewing Angle	Left ,Right:45° , Top:35° ,Down:10°
Monitor Overall Dimension	240(W)x174(H)x30(D)mm
Monitor Weight	<1.5kg
IR Transmitter	(2.3MHz/2.8MHz)(3.2MHz/3.8MHz)
The Specifications are subject to change without prior notice	

## Function

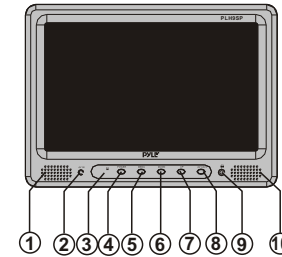

- (1/10) Speaker
- (2) AV IN(Direct Connection of Alternate Audio/Video Source through Aux Line Input Jack)
- (3) Receiving Window of the remote control
- (4) Power
- (5) Menu
- (6) Adjust Down
- (7) Adjust Up
- (8) AV1/AV2
- (9) Headphone Connection

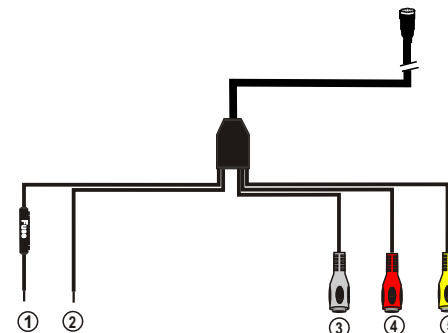

- (1) +12 Volt Accessory(RED)
- (2)(-) Negative Ground(BLACK)
- (3)(RCA)Audio Input L(WHITE)
- (4)(RCA)Audio Input R(RED)
- (5)Video In(YELLOW)